

3M™ CoTran™ 9726 Backing

Ethylene Vinyl Acetate (EVA) Film

Description:

This very flexible film provides high oxygen transmission rates and has good chemical compatibility. The product is supplied in roll form for use in the fabrication of transdermal, topical and transmucosal drug delivery systems.

- 2% vinyl acetate
- Translucent
- Controlled caliper
- Heat-sealable
- Can be laminated directly to adhesives
- Printable
- Matte finish and Corona-treated on both sides
- Manufactured for use in pharmaceutical products

Film Properties:


Test data presented are average values and are not intended to be used for specification purposes.

Properties:	Nominal Values	Nominal Values
	U.S.	Metric
Caliper	2 mils	50.8 μm
Vinyl Acetate Content	2 %	2 %
Tensile		
MD	4 lbs./in.	17.8 N/25.4 mm
CD	2 lbs./in.	8.9 N/25.4 mm
Elongation		
MD	200 %	200 %
CD	300 %	300 %
MVTR		
($\text{g}/\text{m}^2/24 \text{ hr}$)	10.2	10.2
Oxygen Transmission		
($\text{cc}/\text{m}^2/24 \text{ hr}$)	6690	6690

Note: 3M test methods and product specifications available upon request.



Backings

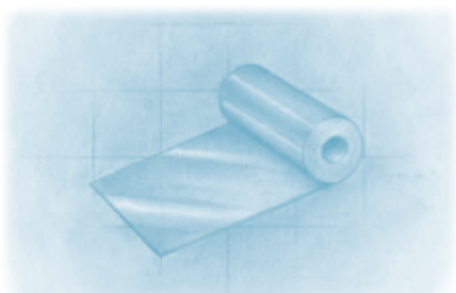

3M Drug Delivery Systems

3M™ CoTran™ 9726 Ethylene Vinyl Acetate Film

General Information:

	Nominal Values U.S.	Nominal Values Metric
Length:	2500 yds. on 3 in. I.D. cores	2286 m on 76 mm I.D. cores
Approximate roll diameters:	2500 yds. – 16 in. 1800 yds. – 13 in. 1000 yds. – 10 in.	2286 m – 41 cm 1650 m – 33 cm 914 m – 25 cm
Width:		
Maximum	48 in.	122 cm
Sample Roll:	25 yds. × 6 in.	23 m × 15 cm
Minimum Order Quantity:	134 yd ²	111 m ²
Maximum Per Roll:	2100 yd ²	1743 m ²

For More Information, Please Call:

U.S.A. (800) 643-8086

Europe 44 (1509) 613070

Japan (03) 3709-9671

www.3M.com/DDS



Traceability:

Each roll and shipment will contain a lot number which is traceable through production records to input materials and process conditions. Material traceability will be in compliance with United States current Good Manufacturing Practices.

Product Safety:

Product safety is characterized by the following evaluations:

- In vitro* Cytotoxicity
- USP Plastics Class V Extraction
 - Intracutaneous Irritation
 - Primary Skin Irritation

Storage Conditions:

The product should be stored at temperatures between 32–86°F (0–30°C) and relative humidity less than 75 percent. The product will maintain the stated performance, for a period of two years from the manufactured date, when stored under recommended conditions.

Product Use:

Customer is solely responsible for determining the suitability of Transdermal Components for the intended use and performing any necessary safety testing.

See 3M General Conditions of Sale for Transdermal Components for warranty information and other terms of sale.



Drug Delivery Systems

3M Center, Building 275-3E-10
St. Paul, MN 55144-1000
U.S.A.
(800) 643-8086
FAX (651) 633-2072

3M Health Care Ltd. Drug Delivery Systems

Morley Street
Loughborough
Leicestershire, LE11 1EP
England
44 (1509) 613070
FAX 44 (1509) 613099

3M Drug Delivery Systems Japan

スリーエム ヘルスケア株式会社
薬事部
本社：158-8583 東京都世田谷区玉川台 2-33-1
(03) 3709-9671
FAX (03) 3709-8754

CoTran is a trademark of 3M.
Copyright © 3M 10/04.
All rights reserved.
70-2008-9176-3